NP Photonics

C&L Band ASE Module

Compact ASE OEM Module



ASE product family which covers a variety of

wavelength ranges, spectral shapes, and output powers. All are available in convenient form factors including: OEM Module and Benchtop.


Features

- Full C&L Band operation
- 7, 10, 13, 17 & 19 dBm
- Integrated pump laser
- Microprocessor control
- Monitoring electronics
- Customizable

Applications

- Sensing
- Passive components testing
- Bio-medical imaging source

Mechanical Outline:

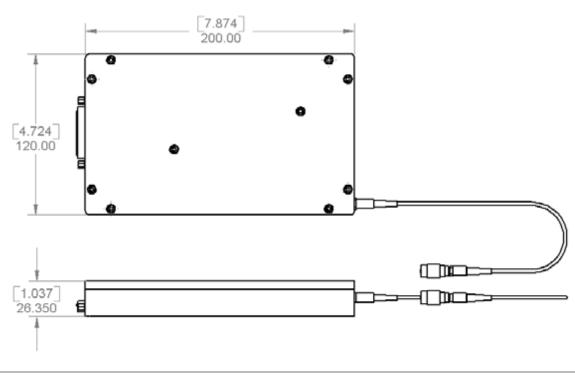


Performance | Reliability | Innovation

Printed in the U.S.A., Specifications subject to change without notice, Rev.3, 02-2013. Copyright @ 2013 NP Photonics, Inc.


PRODUCT SPECIFICATIONS

Parameter

Wavelength Range	1525 to 1610 nm
Output Power	7, 10, 13, 17 & 19 dBm
Minimum power stability (dB) (1 hr) at fixed °C	± 0.02 dB
Minimum spectral power density (dBm/nm)	-1
Optical Bandwidth @ 10 dB point	> 85 n
Output Polarization (Degree of Polarization)	< 5%
Power Consumption	< 6 W
Package Dimension	200 x 120 x 26.35 mm

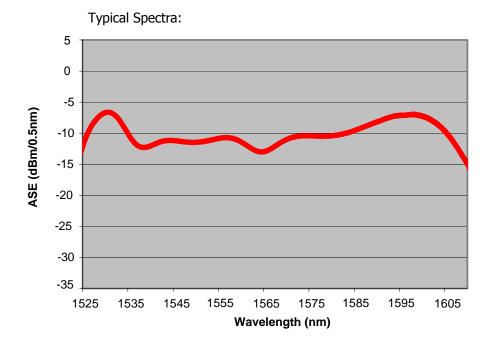

Ordering Example: ASE-CL-M-13-0-U = C&L Band ASE with 13 dBm output power, unflattened, FC/APC connector, Module.

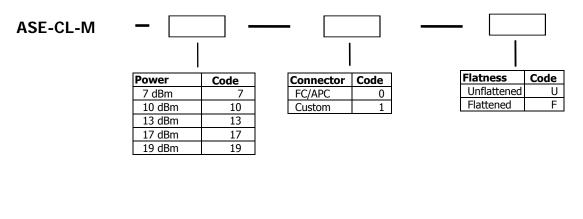



NP Photonics C&L Band ASE Modules are protected by a 12-month warranty. All components and assemblies are unconditionally warranted to be free of defects in workmanship and materials for the warranty period, beginning from the date of shipment. This warranty is in lieu of all other warranties, expressed or implied, and does not cover incidental or consequential loss. This warranty does not apply to devices damaged due to operating conditions outside of the specified parameters. Modified warranties for OEM customers are available.



NP Photonics, Inc.

9030 S. Rita Road, Suite 120 - Tucson, AZ 85747 - USA Phone: 520-799-7400 Fax: 520-799-7403 E--mail: info@npphotonics.com www.npphotonics.com

Specifications subject to change without notice